


REV.

APPR. BY CUSTOMER




CUSTOMER NAME	REV.	DESCRIPTION	DATE	TYPE	TN, POSITIVE/REFLECTIVE	THIRD ANGLE:	MODEL NO.	DATE	CHK.	DATE	APPR.D.	DATE	PAGE
CUSTOMER P/N				VIEWING DIRECTION	6 O'CLOCK		GS-07022AA						
VI-511				DRIVING METHOD	STATIC Vop=4.5V								
QTN NO.				OPERATING TEMP.	-20°C TO $+70^\circ\text{C}$								
				STORAGE TEMP.	-30°C TO $+80^\circ\text{C}$								
				CONNECTION	PIN								

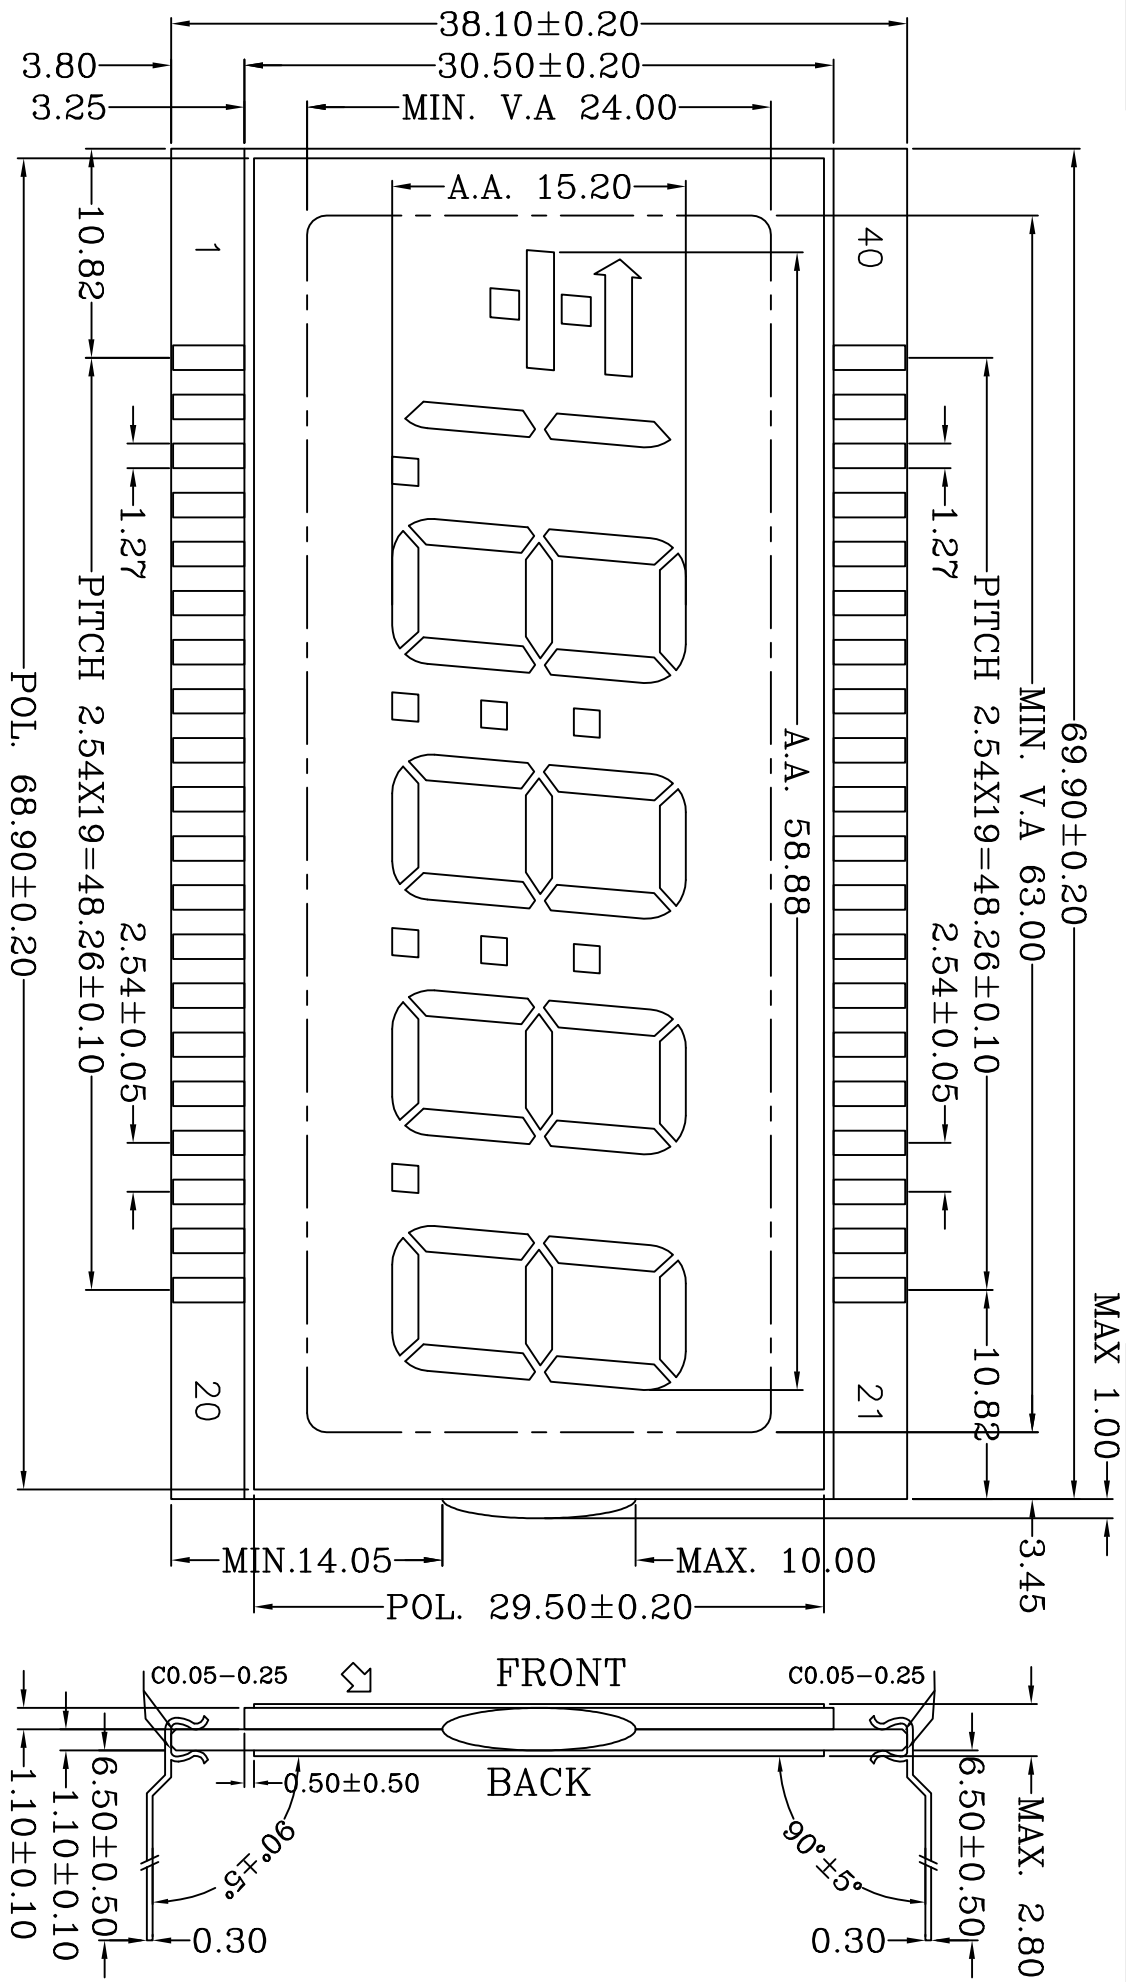

REV. _____

APPR. BY CUSTOMER

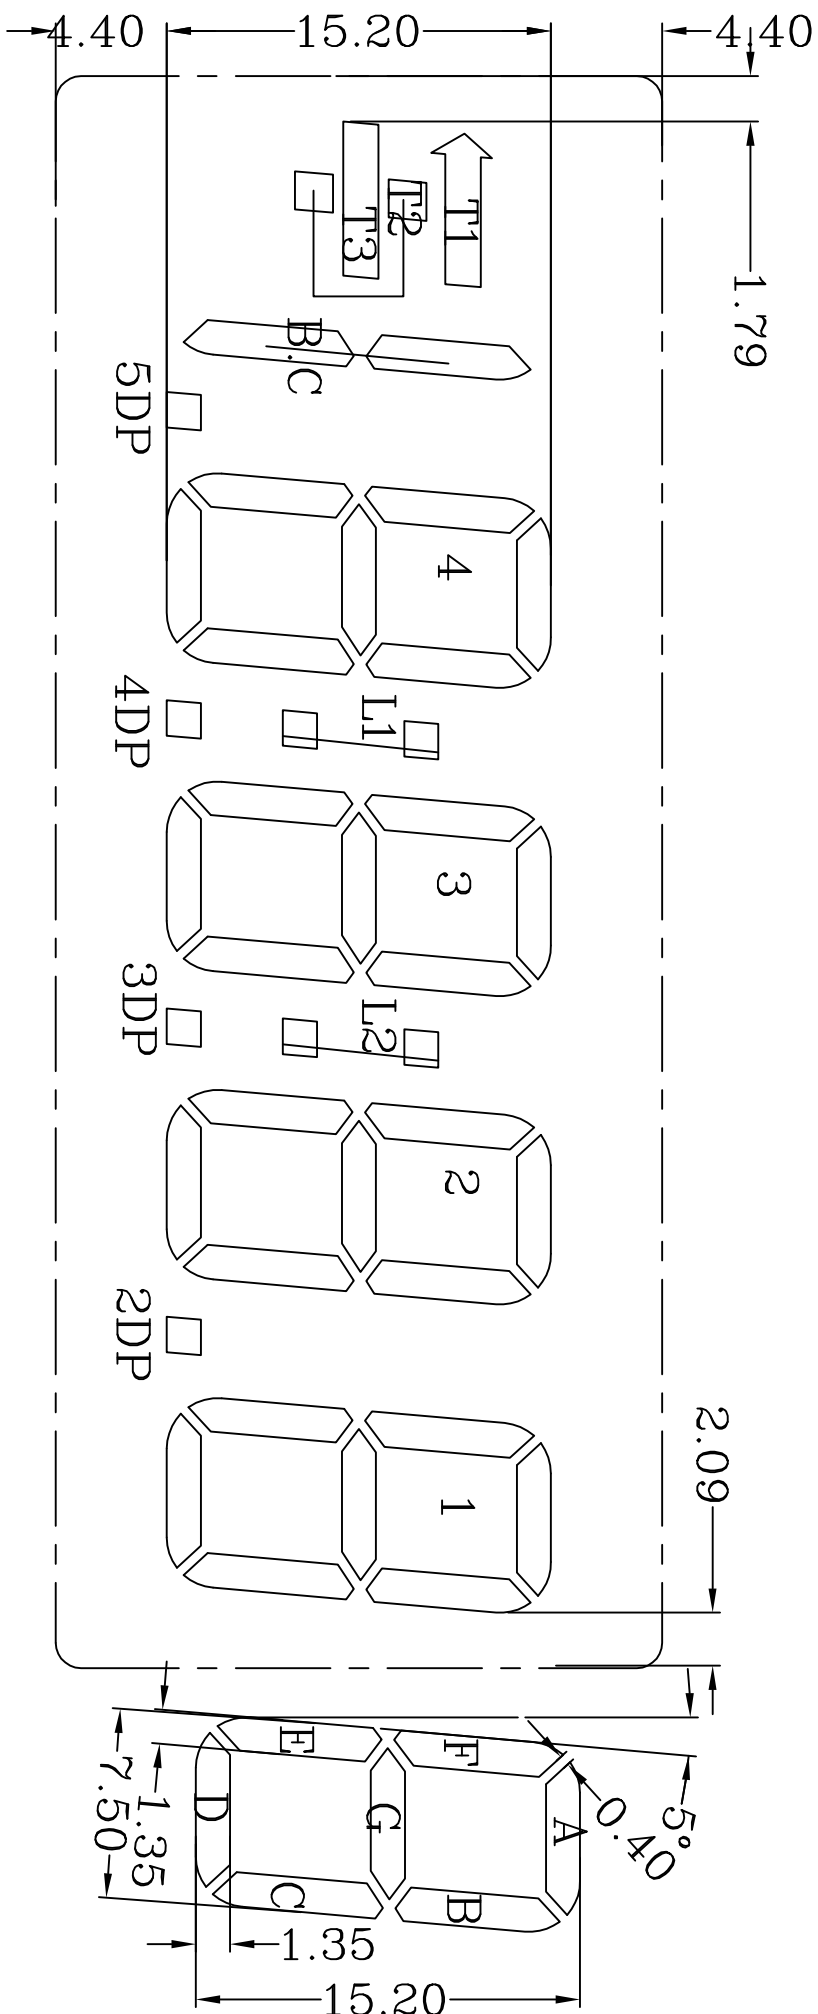

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
COM	COM	T3	B. C	5DP	4E	4D	4C	4DP	3E	3D	3C	3DP	2E	2D	2C	2DP	1E	1D	1C	1B
PIN	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40
COM	1A	1F	1G	2B	2A	2F	2G	L2	3B	3A	3F	3G	L1	4B	4A	4F	4G	T1	T2	COM

CUSTOMER NAME	REV.	DESCRIPTION	DATE	TYPE	TN, POSITIVE/REFLECTIVE	THIRD ANGLE:	MODEL NO.
CUSTOMER P/N				VIEWING DIRECTION	6 O'CLOCK		GS-07022AA
VI-511				DRIVING METHOD	STATIC Vop=4.5V		
QTN NO.				OPERATING TEMP.	-20°C TO +70°C	UNSPECIFIED:	
				STORAGE TEMP.	-30°C TO +80°C	± 0.2mm	
				CONNECTION	PIN	UNSPECIFIED:	
						± 0.5°	
							DWG: XLY
							DATE: 07/07/10
							CHK:
							DATE:
							APPR'D:
							DATE:
							PAGE: 2 OF 2

